



भारत सरकार Government of India
जल शक्ति मंत्रालय Ministry of Jal Shakti
केंद्रीय जल आयोग Central Water Commission
उत्तर-पूर्वी अन्वेषण मंडल-1 North East Investigation Division-1



Email: eneid1.sil-cwc@gov.in

रोंगपुर पार्ट-I, मिलचर, कछार जिला (असम)

neid1sil@rediffmail.com

Rongpur Part-I, Silchar-09 (Assam)

L.NO. NEID-I/HQS/W-20/2019-20/205-07

Dated- 22 /03 /2023

NOTICE INVITING QUOTATION


Sealed quotations are invited on behalf of the President of India, by EE, NEID-I, CWC, Silchar from the bonafide and registered contractors/firms to carry out the 'Repair and Maintenance of Type II C & D quarters at NEID-I, CWC, Rongpur, Silchar-9'. The quotation will be received in the office of the undersigned i.e. O/o Executive Engineer, NEID-I, CWC, Rongpur Part-I, Silchar-9 during the working hours up to 15:30 hrs. on or before 29-03-2023 and shall be opened on the same day at 16:00 hours by the undersigned/authorised officials in presence of the interested quotationers or their authorised representatives who desire to remain present at the time of opening of quotations.

Sl. No.	Description of Item/Works	Last date and time for receiving quotation	Date & Time for opening quotation	Location
1	Repair and Maintenance of Type II C & D quarters at NEID-I, CWC, Rongpur, Silchar-9	<u>29-03-2023</u> <u>15:30 Hrs.</u>	<u>29-03-2023</u> <u>16:00 Hrs.</u>	O/o EE, NEID-I, CWC, Rongpur Part-I, Silchar-9

Terms & Conditions:


1. The work should be completed as per specification within 15 days from the date of issue of the work order.
2. The bidder shall submit EMD (Earnest Money Deposit) of Rs. 3800/- (Rupees Three Thousand Eight Hundred only), along with the quotation in the form of Demand Draft/ Treasury challan/call Deposit/ Banker's cheque/ Fixed Deposit receipt drawn on a Scheduled Nationalised Bank in favour of Executive Engineer, NEID-I, CWC, Silchar, payable at SBI, Silchar. Quotations received without EMD will be rejected.
3. The rate shall be kept valid for minimum period of 60 days from the date of opening of quotation.
4. The rate of GST should be mentioned as applicable.
5. The rate of works should be quoted both in figure and in words.
6. The quotation number with date of its opening has to be clearly mentioned on the top of the quotation and sealed cover Quotation may be dropped in the Tender/Quotation box kept in the office of the undersigned or may be sent by the registered post. (Marked as quotation for Repair and Maintenance of Type II C & D quarters to the undersigned so as to reach on or before the date and time stipulated for receiving the quotation. No quotation will be entertained after the stipulated time.
7. On the behalf of president of India, the undersigned reserves the right to cancel/reject in part or any/all the quotation without assigning any reason thereof and without any financial involvement from either side.
8. Any correction in the quotation should be clearly attested.

10. The work carried out by the firm shall be guaranteed for a period of not less than six months from the date of completion of work.
11. The work should be standard quality and free from all defect and if found not suitable the same shall be asked for replacement at his own cost.
12. All taxes applicable as per rule will be deducted from the final bill.
13. Payment will be made through RTGS on production of bills as per actual.
14. Only those firms having PAN, GSTIN clearance certificate, government registration etc. can be eligible to submit their quotation.
15. Any quotation, which does not comply to the above guidelines runs the risk of being rejected.
16. In case of any dispute, the decision of The Executive Engineer, NEID-I, CWC, Silchar-9 shall be final and binding on all concerned.


(Rajat Kumar Sharma)
Executive Engineer

Copy to:

1. The JE (HQ), NEID-I, CWC, Rongpur Part-I, Silchar-9 for necessary action.
2. The Accounts Branch, NEID-I, CWC, Silchar
3. Notice Board, NEID-I, Silchar.
4. Details of this NIQ is also available on CWC Website and CPP Portal.

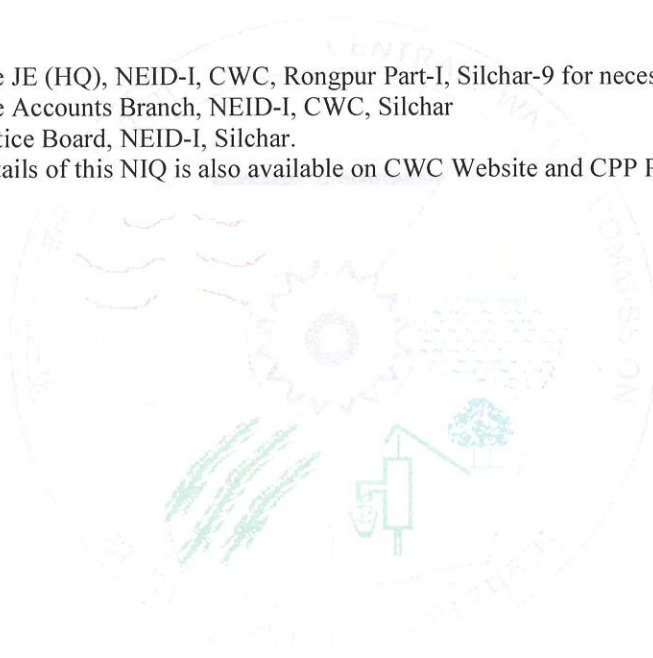

SCHEDULE OF QUANTITIES

Name Of Work: 'Repair & Maintenance of Type-II C & D quarters at the NEID-I, CWC, Rongpur, Silchar'.

SL. No	Particulars of items and details of works	Quantity	Unit	Quoted Rate Exclusive GST	Quoted Amount Exclusive GST
1	Removing dry or oil bound distemper, water proofing cement paint and the like by scrapping, sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete	370.5	sqm		
2	18 mm cement plaster in two coats under layer 12 mm thick cement plaster 1:5 (1 cement : 5 coarse sand) finished with a top layer 6 mm thick cement plaster 1:6 (1 cement : 6 fine sand).	37.0	sqm		
3	Applying one coat of water thinnable cement primer of approved brand and manufacture on wall surface : Water thinnable cement primer	370.5	Sqm		
4	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	370.5	sqm		
5	Distemping with 1st quality acrylic distemper (ready mixed) having VOC content less than 50 gms/litre, of approved manufacturer, of required shade and colour complete, as per manufacturer's specification: Two or more coats on new work	278.9	sqm		
6	Finishing walls with Acrylic Smooth exterior paint of required shade : New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	91.6	sqm		

7	Finishing with Deluxe Multi surface paint system for interiors and exteriors using Primer as per manufacturers specifications: Painting wood work with Deluxe Multi Surface Paint of required shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @0.75 ltr/10 sqm of approved brand and manufacture	81.7	Sqm		
8.	24 mm thick factory made PVC door shutters made of styles and rails of a uPVC hollow section of size 59x24 mm and wall thickness 2 mm (± 0.2 mm) with inbuilt edging on both sides. The styles and rails mitred and joint at the corners by means of M.S. galvanised/ plastic brackets of size 75x220 mm having wall thickness 1.0 mm and stainless steel screws. The styles of the shutter reinforced by inserting galvanised M.S. tube of size 20x20 mm and 1 mm (± 0.1 mm) wall thickness. The lock rail made up of 'H' section, a uPVC hollow section of size 100x24 mm and 2 mm (± 0.2 mm) wall thickness, fixed to the shutter styles by means of plastic/galvanised M.S. 'U' cleats. The shutter frame filled with a uPVC multi-chambered single panel of size not less than 620 mm, having over all thickness of 20 mm and 1 mm (± 0.1 mm) wall thickness. The panels filled vertically and tie bar at two places by inserting horizontally 6 mm galvanised M.S. rod and fastened with nuts and washers, complete as per manufacturer's specification and direction of Engineer-in-charge. (For W.C. and bathroom door shutter)	2.3	Sqm		
9.	Providing and fixing factory made P.V.C. door frame of size 50x47 mm with a wall thickness of 5 mm, made out of extruded 5mm rigid PVC foam sheet, mitred at corners and joined with 2 Nos of 150 mm long brackets of 15x15 mm M.S. square tube, the vertical door frame profiles to be reinforced with 19x19 mm M.S. square tube of 19 gauge, EPDM rubber gasket weather seal to be provided through out the frame. The door frame to be fixed to the wall using	8.5	metre		

	M.S. screws of 65/100 mm size, complete as per manufacturer's specification and direction of Engineerin-Charge				
*Total Quoted Amount (Rs.)					
Amount in Words except GST ()
GST Rate (%)					

***Rate should be exclusive GST; rate of GST should be clearly mentioned.**