Fax: 03624-220870 TEL: 03624-220870



GOVERNMENT OF INDIA CENTRAL WATER COMMISSION PUTHJIMARI PAGLADIYA SUBDIVISION JAIL ROAD, PO MILANPUR NALBARI (ASSAM) PIN 781337

No. PPSD/NLB/A-6(NIQ)/2014/369-73

Dated the 24th October 2014

NOTICE INVITING QUOTATION

Sealed quotations are hereby invited by the undersigned on behalf of the President of India for installation of Musto Type Bench Mark at G&D site <u>Diprang Gaon</u> as detailed below. <u>The quotations should reach in the office of the undersigned on or before 20-11-2014 up to 1500 hrs</u> and will be opened on the same day i.e. <u>20-11-2014 at 1600 hrs</u> in the presence of quotationers or their authorized representatives, if any.

The undersigned reserves the right to accept or reject any or all the quotations without assigning any reason thereof.

SI. No.	Description and specifications of item	Unit	Qty.
1	Construction of Musto Type Bench Mark at Diprang Gaon as	No.	1
	per the drawing attached as Annexure-1.		

Estimated cost : ₹18,831/- (Rupees eighteen thousand eight hundred thirty one only)

Terms & Conditions:

- The quotations duly signed should be properly sealed and dropped in quotation Box in the office of the Sub-Divisional Engineer, PPSD, CWC, Jail Road, PO Milanpur, Nalbari(Assam) PIN-781337. The sealed envelope should be superscribed "Quotation for construction of Musto Type Bench Mark at G&D site Diprang Gaon under PPSD, CWC, Nalbari due on 20-11-2014".
- 2. In the event of the date of opening of quotation being a holiday, quotations will be opened on the next working day with timings unchanged.
- 3. A bid security/EMD of ₹400/- (Rupees four hundred only) shall be deposited in the form of an Account Payee Demand Draft/Banker's cheque from a scheduled Bank in favour of "Executive Engineer, MBD, CWC, Guwahati". The quotations not accompanied by EMD will not be considered. The EMD amount of the successful bidder will be forfeited if the bidder does not start the work within the prescribed period i.e. 10 days from the date of issue of work order. EMD of the successful bidder will be treated as part of Security Deposit.
- 4. Ouotationers must have PAN/TIN/Service Tax number/VAT.
- 5. The undersigned does not bind himself to accept the lowest quotation and reserve the right to accept or reject any or all the quotations without assigning any reason thereof.
- 6. All materials required for the work are to be supplied by the contractor. The material must be of standard quality and as per specifications and free from all defects. The material if found defective subsequently or not conforming to the specifications as stated above, have to be replaced by the firm without any additional charges.
- 7. The work shall have a warranty period of minimum six months from the date of installation.
- 8. Before starting the work, material shall be got approved from SDE, PPSD, CWC, Nalbari.

- 9. The work is estimated to cost ₹18,831/- (Rupees eighteen thousand eight hundred thirty one only). This estimate, however, is given merely as rough guide.
- 10. The quantity of work may be increased or decreased at the time of order without assigning any reason thereof.
- 11. The work of installation of RCC gauge posts at site location in all respects should be completed within 20 days from the date of issue of this order.
- 12. The rate quoted should be inclusive of all duties, taxes and other levies as applicable. No other incidental charge, whatsoever, will be entertained.
- 13. The validity of quotation for acceptance shall be 90 days and rates quoted should remain valid for 180 days from the date of opening.
- 14. The rate should be quoted both in words and in figures. Corrections/ overwriting in the quotation, if any, shall be made by initialing, dating and re-writing.
- 15. The payment will be made by account payee cheque for local supplier or by Demand Draft for outstation supplier on production of pre-receipted bill in triplicate only after satisfactory completion of work as per specification.
- 16. TDS shall be deducted from the bill at the time of payment as per latest Govt. orders.
- 17. Security deposit @5% of the total amount less the EMD amount will be deducted from the bill amount and the same will be released after 30 days beyond the completion of warranty period.

Sub-Divisional Engineer PPSD, CWC, Nalbari

Copy to:

- 1. The Superintending Engineer(HOC), Central Water Commission, Guwahati(Assam).
- 2. The Executive Engineer, MBD, CWC, Guwaahti
- 3. The AAO, MBD, CWC, Guwahati to extend your kind operation for opening of quotation.
- 4. Notice board of office of Executive Engineer, MBD, CWC, Adabari, Guwaahti 781014/SDE, PPSD, Nalbari(Assam).

SCHEDULE OF QUANTITY

State: Central Sub-Division: P.P.Sub-Division, CWC, Nalbari Branch: CWC Division: - M.B. Division, CWC, Guwahati

Name of Work:-Construction of Musto Type Bench Mark at Diprang Gaon G&D site under P.P.Sub- Division, CWC, Nalbari for the year 2014-2015.

NIQ Ref. No. :- PPSD/NLB/A-6/2014/369-73 dated:- 24/10/2014

SI.No.	Items work	Qty.	Unit	Rate in Rs.	Amoun t in Rs.
1	Earth work in excavation for foundation trenches of walls, retaining walls footings of column steps, septic tanks etc. including refilling (return filling) the quantity as necessary after completion of works, breaking clods in return filling, dressing, watering and ramming etc. and removal of surplus earth with all lead and lifts as directed and specified in the following classification of soils including bailing out water where necessary as directed and specified (A) Up to a depth of 2.00m bellow the existing ground level. (a) In ordinary soil.	2.653	m ³		
2	Providing brick soling in foundation and under floor with stone / best quality picked jhama brick, sand packed and laid to level and in panel after preparing the subgrade as directed including all labour and materials and if necessary dewatering, complete. (a) Brick on flat soling.	1.56	m ²		
3	Supplying, fitting and fixing in position reinforcement bars conforming relevant I.S.Code for R.C.C works / R.B.walling including straightening cleaning, cutting and bending to proper shapes and length as per details, supplying and binding with 20G annealed black wire and placing in position with proper blocks, supports, chaires, spacers etc complete (No extra measurement for lap, hook, chair, anchor etc will be entertained in the measurement as they are included in the rate) (upto 1st floor level) (c) ISI approved Mild steel reinforcement bar (M.S. Bar)	0.040	Qntl		
4	Providing form work of ordinary timber planking so as to give a rough finish including entering shuttering strutting & propping etc. height of propping and centering below supporting floor to ceiling not exceeding 4.0m and removal of the same for in-situ reinforced concrete and plain concrete works in Foundation, footings, bases of columns, pile cap, raft. & mass Concrete works etc. (ii) Using 25mm thick plank.	7.18	m²		

Plain cement concrete works with coarse aggregate of sizes 13 mm to 32 mm in foundation bed for footing steps, walls, brick works etc. as directed and specified including dewatering if necessary and curing complete (shuttering where necessary shall be measured and paid separately (a) in prop. 1 cement: 3 sand: 6 coarse agg. By volume. (Using mixture machine) 6 Providing and laying plain cement/reinforced cement concrete works cement with coarse sand & 20mm downgraded stone aggregate including dewatering if necessary, and curing complete but excluding cost of form work and reinforcement for reinforced cement concrete work (form work and reinforcement for reinforced cement concrete work (form work and reinforcement on the parameter) (1) Using mixture machine (A) In sub-structure upto plinth level. Foundation, footing, columns with base, tie and plinth beam, grade beam, pile cap, base slab, retaining walls, walls of septic tank, inspection pit and the like and other works not less than 100 mm thick upto plinth level. (N) without using admixture, plasticciser (a) M15 grade concrete or Prop. 1:2:4 7 Brick work in cement mortar with 1st class brick including racking out joints and curing complete as directed. (I)In sub-structure up to plinth level including dewatering if ;necessary (b)In prop: 1:4 8 15mm thick cement plaster in single coat on single or half brick wall for interior plastering up to 1st floor level including arises, internal rounded angles not exceeding 80mm girth and finished even and smooth including curing complete as directed. (B) On fair side (b)In cement mortar 1:4 9 Finishing old/new wall with water proofing weather coat smooth antifungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including scaffolding complete as directed at all levels (two coats).					
coarse sand & 20mm downgraded stone aggregate including dewatering if necessary, and curing complete but excluding cost of form work and reinforcement for reinforced cement concrete work (form work and reinforcement will be measured and paid separately.) (I) Using mixture machine (A) In sub-structure upto plinth level. Foundation, footing, columns with base, tie and plinth beam, grade beam, pile cap, base slab, retaining walls, walls of septic tank, inspection pit and the like and other works not less than 100 mm thick upto plinth level. (N) without using admixture, plasticciser (a) M15 grade concrete or Prop. 1:2:4 7 Brick work in cement mortar with 1st class brick including racking out joints and curing complete as directed. (I)In sub-structure up to plinth level including dewatering if ;necessary (b)In prop: 1:4 8 15mm thick cement plaster in single coat on single or half brick wall for interior plastering up to 1st floor level including arises, internal rounded angles not exceeding 80mm girth and finished even and smooth including curing complete as directed. (B) On fair side (b)In cement mortar 1:4 9 Finishing old/new wall with water proofing weather coat smooth antifungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including	5	foundation bed for footing steps, walls, brick works etc. as directed and specified including dewatering if necessary and curing complete (shuttering where necessary shall be measured and paid separately (a) In prop. 1 cement: 3 sand: 6 coarse	2.300	m³	
7 Brick work in cement mortar with 1 st class brick including racking out joints and curing complete as directed. (I)In sub-structure up to plinth level including dewatering if; necessary (b)In prop: 1:4 8 15mm thick cement plaster in single coat on single or half brick wall for interior plastering up to 1st floor level including arises, internal rounded angles not exceeding 80mm girth and finished even and smooth including curing complete as directed. (B) On fair side (b)In cement mortar 1:4 9 Finishing old/new wall with water proofing weather coat smooth antifungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including	6	Providing and laying plain cement/reinforced cement concrete works cement with coarse sand & 20mm downgraded stone aggregate including dewatering if necessary, and curing complete but excluding cost of form work and reinforcement for reinforced cement concrete work (form work and reinforcement will be measured and paid separately.) (I) Using mixture machine (A) In sub-structure upto plinth level. Foundation, footing, columns with base, tie and plinth beam, grade beam, pile cap, base slab, retaining walls, walls of septic tank, inspection pit and the like and other works not less than 100 mm thick upto plinth level. (N) without using admixture, plasticciser	0.90	m³	
for interior plastering up to 1st floor level including arises, internal rounded angles not exceeding 80mm girth and finished even and smooth including curing complete as directed. (B) On fair side (b)In cement mortar 1:4 9 Finishing old/new wall with water proofing weather coat smooth antifungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including	7	Brick work in cement mortar with 1 st class brick including racking out joints and curing complete as directed. (I)In sub-structure up to plinth level including dewatering if ;necessary	0.541	m ³	
fungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including	8	for interior plastering up to 1st floor level including arises, internal rounded angles not exceeding 80mm girth and finished even and smooth including curing complete as directed. (B) On fair side	9.45	m ²	
	9	fungal exterior painting of approved make of berger paint of required shade after cleaning and clearing the surface etc. including	5.94	m ²	

10	Earth/sand filling in plinth in layers not more than 150mm thick including necessary carriage, watering, ramming etc. complete as directed and specified including payment of land compensation, forest royalty, sales tax and other duties and taxes as may be necessary. (c) with river sand or silt (predominantly non plastic) by truck carriage	0.608	m³		
	including loading and unloading.				


Terms and conditions:-

1. No materials shall be provided by the department for the above works.

Signature of Contractor:-Full Address:-

SUB-DIVISIONAL ENGINEER P.P. SUB-DIVISION, NALBARI

MUSTO TYPE EMBEDED BENCH MARK

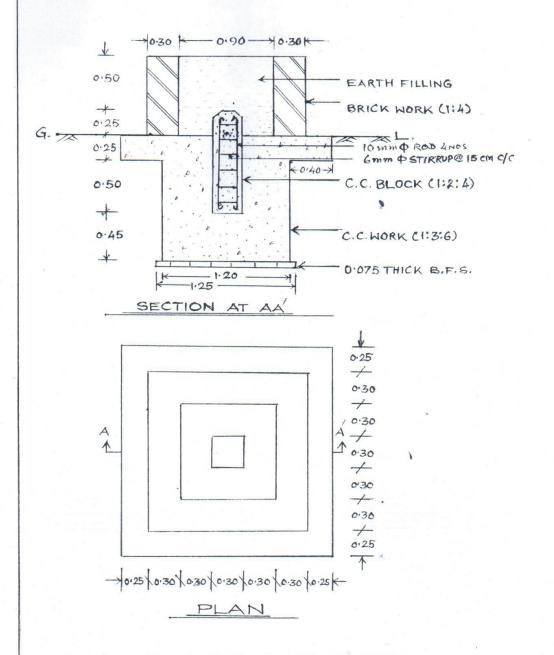

ALL DIMENSIONS ARE IN METRE