भारत सरकार File No. N-74074/235/2021-WSD-CHANDRAPUR

जलशक्तिमंत्रालय जल संसाधन नदी विकास एवं गंगा संरक्षण विभाग केन्द्रीय जल आयोग वधी उप-मण्डल, चंद्रप्र



Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

NOTICE INVITING QUOTATION

Sealed quotation are hereby invited from registered firms/ reputed parties to carry out the civil work for construction gauge reader room in existing AWLR "at site Bamni under WSD, CWC, Chandrapur", as per details given in annexure-I

Terms and conditions:-

- त. दरों को एफ.ओ.आर. गंतव्य पैकिंग, अग्रेषण, माल, बीमा, यदि कोई हो, के समावेशी उपमंडलीय अभियंता, वर्धा उपमंडल के.ज. आ. चंद्रपुर के अन्तर्गत साईट कार्य स्थल तक होना चाहिए जो कि Annexure 1 में दिया गया है।
- 2. कोटेशन के खुलने की तारीख से न्यूनतम 30 दिनों के लिए दरें मान्य होंगी।
- 3. Gauge reader room construction का कार्य आदेश से 30 दिनों के भीतर किया जाना चाहिए।
- 4.दरों में सभी करों और लेवी को शामिल किया जाना चाहिए किसी भी खाते पर कोई अतिरिक्त भुगतान नहीं किया जायेगा। 5. कोटेड राशि का 5% बिल से रखा जायेगा क्योंकि छः महीने कि वारंटी अवधि तक प्रदर्शन कि गारंटी होगी जो कि फाइनल बिल से काटा जायेगा।
- 6 Gauge reader room construction का कार्य विनिर्देशों के अनुसार कड़ाई से होना चाहिए, अन्यथा अन्वीकृति के लिए उत्तरदायी होगा।
- 7. तीन प्रतियों में पूर्व प्राप्त बिल को सामग्री के संतोषजनक वितरण के बाद भुगतान करने के लिए प्रस्तुत करना होगा तथा पुरे में पिएफएमएस ऑनलाइन पोर्टल द्वारा भुगतान किया जायेगा, इसके लिए बिल कि रसीद पुरी तरह से जमा करनी होंगी।
- 8. बोलीदाताओं को इस दस्तावेज में उल्लेखित सभी नियम और शर्तों को ध्यान में रखते हुए दरों को उद्धरण करना चाहिए।
- 9. NIQ को एक मोहरबंद बड़े लिफाफे में जमा किया जाना चाहिए । 10. बिडर को जीसटी पंजीकरण प्रमाणपत्र प्रस्तुत करना चाहिए ।

10.बिंडर को जिसटी पंजीकरण प्रमाणपत्र प्रस्तुत करना चाहिए

Sealed quotation duly superscribed "Quotation for construction of gauge reader room construction at site Bamni under WSD, CWC, Chandrapur", will be received by the undersigned till 11.00 Hrs on 28/11/2021 and will be opened on 11.30 Hrs at 28/11/2021 in the presence of interested parties. Quotation received after schedule time will not be considered.

Undersigned reserves the right to reject any or all the quotation without assigning any reason therefore.

(B.M.BORKAR) AEE, WSD, Chandrapur

Copy for information and publicity to:-

1. अधिसाशी अभियंता, वैनगंगा डिवीजन, सीडब्लूसी व्दितीय तल, ब्लॉक 'सी' नागपुर / Executive Engineer, Wainganga Division, CWC, 2nd Floor, block-C, Nagpur. 2.किनष्ट अभियंता, वैनगंगा मंडल, सीडब्लूसी, नागपुर I सीडब्लूसी निविदा पोर्टल पर अपलोड करने हेतु I

Junior Engineer, Wainganga Division, CWC, Nagpur. For uploading on CWC tender portal.

- 3.ऑफिस नोटिस बोर्ड./ Office notice board.
- 4.कार्यस्थल बामनी के ऑफिस नोटिस बोर्ड पर चिपकाऍ I Display on office notice board at site Bamni.

वर्धा उप मंडल (प्रथम तल) , केंद्रीय जल आयोग , जिला स्टेडियम के पास , सिविल लाइन्स

चंद्रपुर -४४२४०१ फोन: ०७१७२ -२८०८४५

ई-मेल: sdewsd-cwc@nic.in



Wardha Sub-Division (1 $^{\rm st}$ Floor), Central Water

Commission

District stadium, Civil Lines, Chandrapur - 442401

e: 07172-250845E-mail: sdewsd-cwc@nic.in



Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

NAME OF THE WORK: R&M of Providing Gauge Reader room in existing AWLR frame at site Bamni, under WSD, Chandrapur Year:2021-2022

ITEM NO.	Description of work	Quantity or No.	Rate in Rs.	Unit	Amount in Rs.
1	Surface dressing of the ground including removing vegetation and inequalities not exceeding 15 cm deep and disposal of rubbish, lead up to 50 m and lift up to 1.5 m. All kind of Soil .DSR 2021 (code 2.28.1)	21.16		sq.m.	
2	Earth work in surface excavation not exceeding 30 cm in depth but exceeding 1.5 m in width as well as 10 sqm on plan including getting out and disposal of excavated earth upto 50 m and lift upto 1.5 m, as directed by Engineer-in-Charge. DSR 2021 (code 2.1.1)	21.16		sq.m.	
3	Providing and fixing at or near ground level precast cement concrete in kerbs, edgings etc. as per approved pattern and setting in position with cement mortar 1:3 (1 Cement : 3 coarse sand), including the cost of required centering, shuttering complete. 1:1½:3 (1 Cement: 1½ coarse sand(zone-III) derived from natural sources: 3 graded stone aggregate 20 mm nominal size derived from natural sources).DSR 2021 (CODE 4.6.1)	0.16		cu.m.	



ई-मेल: sdewsd-cwc@nic.in



Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

4	Providing and laying factory made chamfered edge Cement Concrete paver blocks in footpath, parks, lawns, drive ways or light traffic parking etc, of required strength, thickness & size/ shape, made by table vibratory method using PU mould, laid in required colour & pattern over 50mm thick compacted bed of sand, compacting and proper embedding/laying of inter locking paver blocks into the sand bedding layer through vibratory compaction by using plate vibrator, filling the joints with sand and cutting of paver blocks as per required size and pattern, finishing and sweeping extra sand. complete all as per direction of Engineer-in-Charge. 60mm thick cement concrete paver block of M-35 grade with approved colour, design & pattern.DSR 2021 (code 16.91.1)	11.55	sq.m.	
5	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level. Cold twisted bars. DSR 2021 (code 5.22A.3)	75.59	kg	
6	Providing and laying damp-proof course 50mm thick with cement concrete 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20mm nominal size derived from natural sources). DSR 2021 (code 4.11)	2.4	sq.m.	

वर्धा उप मंडल (प्रथम तल) , केंद्रीय जल आयोग , जिला स्टेडियम के पास , सिविल लाइन्स चंद्रपुर -४४२४०१ फोन: ०७१७२ -२८०८४५

ई-मेल: sdewsd-cwc@nic.in



Wardha Sub-Division (1st Floor), Central Water Commission Near District stadium, Civil Lines, Chandrapur – 442401



Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

7	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in, Cement mortar 1:4 (1 cement : 4 coarse sand). DSR 2021 (code 6.4.1)	5.42		cu.m.	
8	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level, 1:4:8 (1 Cement : 4 coarse sand (zone-III) derived from natural sources : 8 graded stone aggregate 40 mm nominal size derived from natural sources) DSR 2021 (code 4.1.8)	0.94		cu.m.	
8	Providing corrugated G.S. sheet roofing including vertical / curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (up to any pitch in horizontal/ vertical or curved surfaces), excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 1.00 mm thick with zinc coating not less than 275 gm/m².DSR 2021 (code 12.1.1)	6.25	33	sq.m.	
9	20mm Cement plaster of mix 1:4 (1 cement:4 coarse sand). DSR 2021 (code 13.6.1)	45.14		sq.m.	

वर्धा उप मंडल (प्रथम तल) , केंद्रीय जल आयोग , जिला स्टेडियम के पास , सिविल लाइन्स चंद्रपुर -४४२४०१ फोन: ०७१७२ -२८०८४५

ई-मेल: sdewsd-cwc@nic.in



Wardha Sub-Division (1st Floor), Central Water Commission Near District stadium, Civil Lines, Chandrapur – 442401




Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

10	Finishing walls with textured exterior paint of required shade . New work (Two or more coats applied @ 3.28 ltr/10 sqm) over and including priming coat of exterior primer applied @ 2.20kg/10 sqm. DSR 2021 (code 13.45.1)	45.14	sq.m.	
11	Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6 mm angle iron and 3 mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. Using flats 30x6mm for diagonal braces and central cross piece. DSR 2021 (code 10.5.2)	2.25	sq.m.	





Government of India Ministry of Jal Shakti Dept. of Water Resources, RD&GR Central Water Commission Wardha Sub-Division, Chandrapur

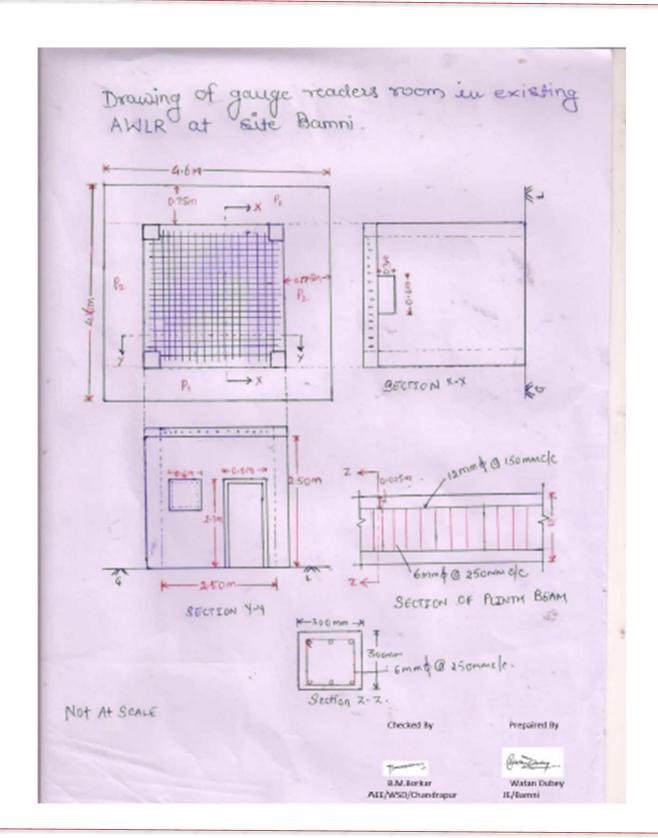

वर्धा उप मंडल (प्रथम तल) , केंद्रीय जल आयोग , जिला स्टेडियम के पास , सिविल लाइन्स चंद्रपुर -४४२४०१ फोन: ०७१७२ -२८०८४५

ई-मेल: <u>sdewsd-cwc@nic.in</u>



Wardha Sub-Division (1st Floor), Central Water Commission Near District stadium, Civil Lines, Chandrapur – 442401