



भारत सरकार
Government of India
केन्द्रीय जल आयोग
Central Water Commission
उपरी चम्बल उपमंडल
Upper Chambal Sub Division



तृतीय तल, A- विंग, सी.जी.ओ. भवन, इन्दौर-452001 दूरभाष/Tele: 0731-2490852
C.G.O. Complex, Third Floor, Indore (M.P.)-452001 टेली फेक्स/Telefax : 0731-2490852
ई मेल/e-mail:ucsd.cwcindore@gmail.com

पत्रांक: उचउमं-इ/सिविल कार्य/2021/292-96

दिनांक: 09/08/2021

कोटेशन आमंत्रण सूचना


Sealed/closed quotations are hereby invited by the undersigned on behalf of President of India from the contractors for the following work **Construction of Wire Fencing at Mahidpur GDSQT site under Upper Chambal Sub Division, CWC, Indore.** As per bill of quantity enclosed.

The quotation should reach in the office of the undersigned on or before 18.08.2021 up to 14:00 hrs and will be opened on the same day at 14:30 hrs in the presence of intending quotationers, if any. If quotation could not be opened on aforesaid date due to unavoidable circumstances, then same will be opened on next working day without any further notice.

Terms & Conditions

1. The work should be done as per CPWD specification & direction of Engineer in-charge.
2. Rates should be quoted both in figure and words.
3. Signed copy of GST Registration number, PAN No and Experience certificate any civil work should be attached.
4. Income tax & other tax etc. shall be deducted from the bill as per rule.
5. The work should be completed within fifteen days from the date of issue of work order.
6. The payment will be made by Online/PFMS after satisfactory completion of work.
7. No advance payment shall be made.

Encls: Bill of Quantity


उपमंडलीय अभियन्ता
उपरी चंबल उपमंडल, इंदौर

प्रतिलिपि :-

1. श्रीमान् अधिशासी अभियन्ता, चंबल मंडल, जयपुर को सूचनार्थ एवं CWC Tender Website पर अपलोड करने हेतु प्रेषित है।
2. लेखा शाखा, चंबल मंडल, जयपुर।
3. नोटिस बोर्ड उपरी चंबल उपमंडल, इंदौर।
4. कनिष्ठ अभियन्ता (मु), उपरी चंबल उपमंडल, इंदौर।
5. कनिष्ठ अभियन्ता, महिदपुर स्थल।

Bill of Quantity

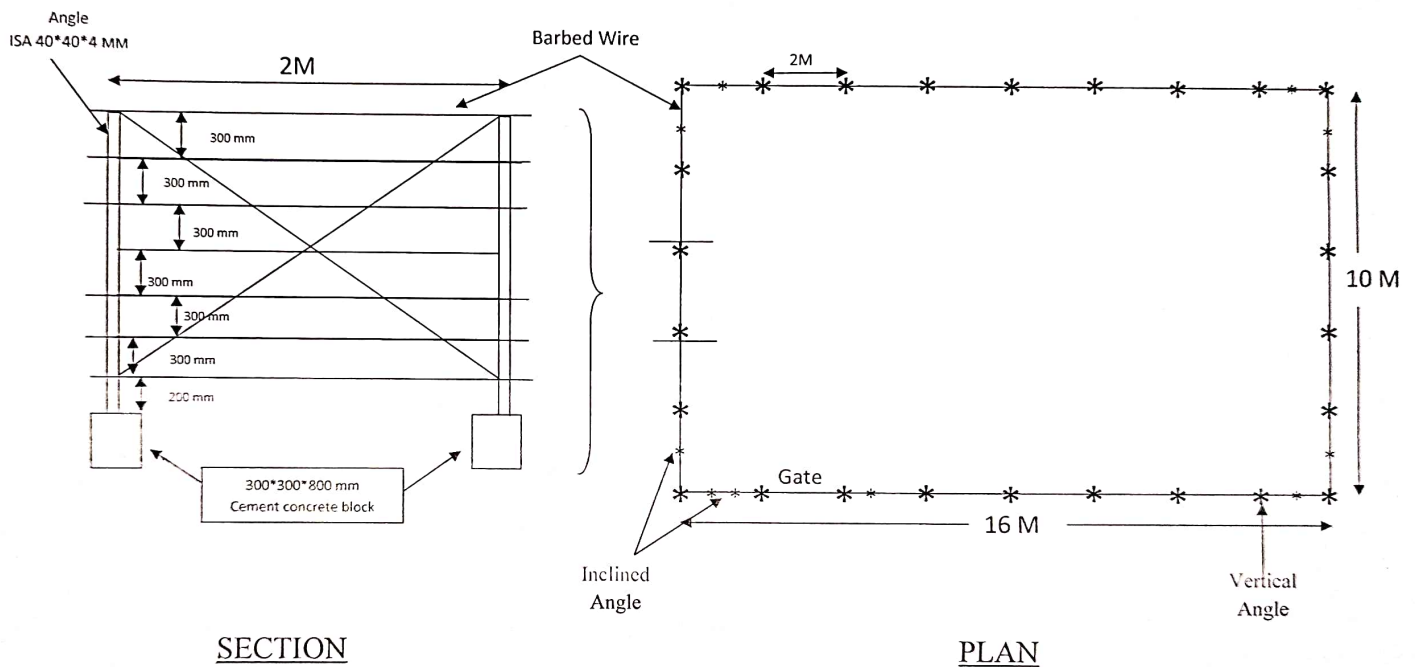
Name of work:- Construction of Wire Fencing at Mahidpur GDSQT site under Upper Chambal Sub Division, CWC, Indore.

| It. no. | Description of work | Qty | Unit | Rate in Rupees | | Amount |
|------------------------------|--|--------|-------|----------------|----------|--------|
| | | | | In figure | In Words | |
| 1 | Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) Including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge. All kinds of soil | 2.592 | Cum | | | |
| 2 | Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources) | 2.592 | Cum | | | |
| 3 | Fencing with angle iron post placed at required distance embedded in cement concrete blocks, every 15th post, last but one end post and corner post shall be strutted on both sides and end post on one side only and provided with horizontal lines and two diagonals interwoven with horizontal wires, of barbed wire weighing 9.38 kg per 100 m (minimum), between the two posts fitted and fixed with G.I. staples, turn buckles etc. complete. (Cost of posts, struts, earth work and concrete work to be paid for separately). Payment to be made per metre cost of total length of barbed wire used. With G.I. barbed wire | 504.40 | Meter | | | |
| 4 | Supplying at site Angle iron post & strut of required size including bottom to be split and bent at right angle in opposite direction for 10 cm length and drilling holes upto 10 mm dia. etc. complete ISA 40*40*4 MM OF 2.8 M HEIGHT(2.4 kg per meter) | 241.92 | Kg | | | |
| 5 | Applying priming coat: With ready mixed red oxide zinc chromate primer of approved brand and manufacture on steel galvanised iron/steel works | 16.128 | Sqm | | | |
| 6 | Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : Two or more coats on new work | 11.52 | Sqm | | | |
| Total amount | | | | | | |
| GST @ 12% | | | | | | |
| Grand Total Amount :- | | | | | | |


Issuing authority
 Sub Divisional Engineer


Signature of Contractor
 Seal
 Address

Mahidpur GDSQT Site Barbed Wire Fencing



SECTION

PLAN


Sub Divisional Engineer


Junior Engineer