



भारत सरकार Government of India
जल शक्ति मंत्रालय Ministry of Jal Shakti
केंद्रीय जल आयोग Central Water Commission
उत्तर-पूर्वी अन्वेषण मंडल-1 North East Investigation Division-1



Email: eeneid1.sil-cwc@gov.in

रोंगपुर पार्ट-I, सिलचर, कछार जिला (असम)

neid1sil@rediffmail.com

Rongpur Part-I, Silchar-09 (Assam)

L.NO. NEID-I/HQS/W-20/2019-20/ 51-55

Dated- 20 / 02 /2025

NOTICE INVITING QUOTATION


Sealed quotations are invited on behalf of the President of India, by EE, NEID-I, CWC, Silchar from the bonafide and registered contractors/firms to carry out the **'Minor Repair & Maintenance of Type-III (B) and Dining area (Type-II (B) and Type II (D) Quarters) (in the colony complex & the O/o Executive Engineer) under NEID-I, CWC, Silchar.** The quotation will be received in the office of the undersigned i.e. O/o Executive Engineer, NEID-I, CWC, Rongpur Part-I, Silchar-9 during the working hours up to 15:00 hrs. on or before 27-02-2025 and shall be opened on the same day at 15:30 hours by the undersigned/authorised officials in presence of the interested quotationers or their authorised representatives who desire to remain present at the time of opening of quotations.

Sl. No.	Description of Item/Works	Last date and time for receiving quotation	Date & Time for opening quotation	Location
1	'Minor Repair & Maintenance of Type-III (B) and Dining area (Type-II (B) and Type II (D) Quarters) (in the colony complex & the O/o Executive Engineer) under NEID-I, CWC, Silchar.	<u>27-02-2025</u> <u>15:00 Hrs.</u>	<u>27-02-2025</u> <u>15:30 Hrs.</u>	O/o EE, NEID-I, CWC, Rongpur Part-I, Silchar-9

Terms & Conditions:

1. The work should be completed as per specification within 30 days from the date of issue of the work order. Failing which appropriate penalty as estimated on the basis of damage suffered due to stated delays Rs- 1000 per day will be levied.
2. The bidder shall submit EMD (Earnest Money Deposit) of Rs. 2,000/- (Rupees Two Thousand only), along with the quotation in the form of Demand Draft/ Treasury challan/call Deposit/ Banker's cheque/ Fixed Deposit receipt drawn on a Scheduled Nationalised Bank in favour of Executive Engineer, NEID-I, CWC, Silchar, payable at SBI, Silchar. Quotations received without EMD will be rejected. MSE & Start-up are exempted from payment of EMD.
3. On acceptance of the quotation, the Firm/Agency shall have to submit Guarantee @ 3% of the tendered amount in the form of an Account Payee D.D/ Fixed Deposit Receipt/ Banker's cheque or Bank Guaranty from any of the commercial bank in favour of Executive Engineer, NEID-I, CWC, Silchar payable at Silchar. This should remain valid for a period of 180 days beyond the date of completion of work.
4. The rate shall be kept valid for minimum period of 60 days from the date of opening of quotation.
5. The rate of GST should be mentioned as applicable.
6. The rate of works should be quoted both in figure and in words.

7. The quotation number with date of its opening has to be clearly mentioned on the top of the quotation and sealed cover Quotation may be dropped in the Tender/Quotation box kept in the office of the undersigned or may be sent by the registered post. (Marked as quotation for Minor Repair & Maintenance of Type-III (B) and Dining area (Type-II (B) and Type II (D) Quarters) Quarters to the undersigned so as to reach on or before the date and time stipulated for receiving the quotation. No quotation will be entertained after the stipulated time.
8. On the behalf of president of India, the undersigned reserves the right to cancel/reject in part or any/all the quotation without assigning any reason thereof and without any financial involvement from either side.
9. Any correction in the quotation should be clearly attested.
10. Request for any advance payment will not be entertained.
11. The work carried out by the firm shall be guaranteed for a period of not less than six months from the date of completion of work.
12. The work should be standard quality and free from all defect and if found not suitable the same shall be asked for replacement at his own cost.
13. All taxes applicable as per rule will be deducted from the final bill.
14. Payment will be made through RTGS on production of bills as per actual.
15. Only those firms having PAN, GSTIN clearance certificate, government registration etc. can be eligible to submit their quotation.
16. Any quotation, which does not comply with the above guidelines, runs the risk of being rejected.
17. Claim/claims of damage or loss of equipment & material and life due to theft, accident or natural calamity or any other reason whatsoever shall not be entertained by the department.
18. In case of any dispute, the decision of The Executive Engineer, NEID-I, CWC, Silchar-9 shall be final and binding on all concerned.

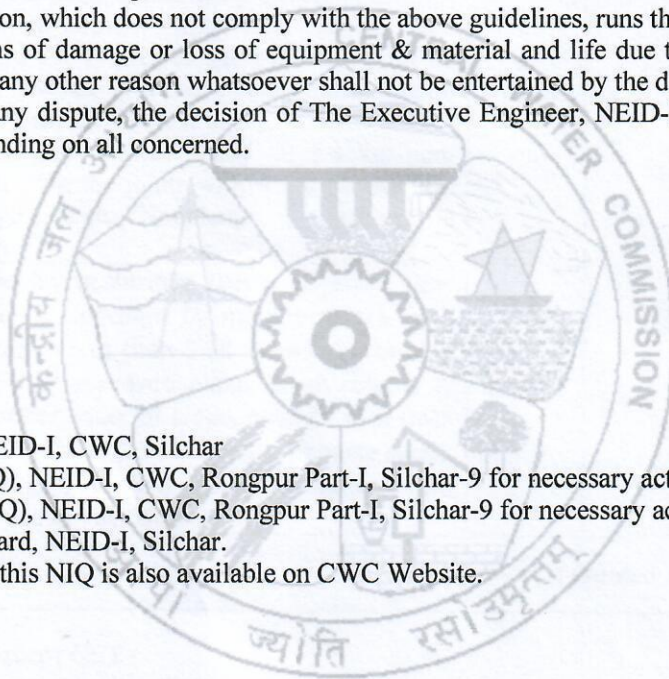

Saket Kumar
20/02/25
(Saket Kumar)
Executive Engineer

Copy to:

1. AAO, NEID-I, CWC, Silchar
2. SDE, (HQ), NEID-I, CWC, Rongpur Part-I, Silchar-9 for necessary action.
3. The JE (HQ), NEID-I, CWC, Rongpur Part-I, Silchar-9 for necessary action.
4. Notice Board, NEID-I, Silchar.
5. Details of this NIQ is also available on CWC Website.

SCHEDULE OF QUANTITIES

Name Of Work: " Minor Repair & Maintenance of Type-III (B) and Dining area (Type-II (B) and Type II (D) Quarters) (in the colony complex & the O/o Executive Engineer) under NEID-I, CWC, Silchar.

SL. No	Particulars of items and details of works	Qty	Unit	Quoted Rate Exclusive GST	Quoted Amount Exclusive GST
1	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	43.22	Sqm		
2.	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement: 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600x600 mm	43.22	Sqm		
3.	Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting , riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including. Size of Tile 600x600 mm	5.04	Sqm		
*Total Quoted Amount (Rs.)					
Amount in Words except GST ()					
GST Rate (%)					