



भारत सरकार Government of India  
जल शक्ति मंत्रालय Ministry of Jal Shakti  
केंद्रीय जल आयोग Central Water Commission  
उत्तर पूर्वी अन्वेषण मंडल 1 North East Investigation Division-1



Email: [eeheid1sil-cwc@gov.in](mailto:eeheid1sil-cwc@gov.in)  
[heid1sil@rediffmail.com](mailto:heid1sil@rediffmail.com)

रोंगपुर पार्ट-1, मिलचर कच्छार जिला .असम.  
Rongpur Part-I, Silchar-09 (Assam)

L.NO. NEID-1/HQS/W-20/2019-20/56-59

Dated- 16/01/2023

**NOTICE INVITING QUOTATION**

Sealed quotations are invited on behalf of the President of India, by EE, NEID-I, CWC, Silchar from the bonafide and registered contractors/firms to carry out the 'Repair and Maintenance of sub division office of ceiling & flooring work in NEID-I, CWC, Rongpur, Silchar-9' during the financial year 2022-23. The quotation will be received in the office of the undersigned i.e. O/o Executive Engineer, NEID-I, CWC, Rongpur Part-I, Silchar-9 during the working hours up to 12.00 hrs. on or before 23-01-2023 and shall be opened on the same day at 12.30 hours by the undersigned/authorised officials in presence of the interested quotationers or their authorised representatives who desire to remain present at the time of opening of quotations.

Sl. No.	Description of Item/Works	Last date and time for receiving quotation	Date & Time for opening quotation	Location
1	'Repair and Maintenance of sub division office of ceiling & flooring work in NEID-I, CWC, Rongpur, Silchar-9'	<u>23-01-2023</u> 12.00 Hrs.	<u>23-01-2023</u> 12.30 Hrs.	O/o EE, NEID-I, CWC, Rongpur Part-I, Silchar-9

**Terms & Conditions:**

1. The work should be completed as per specification within 15 days from the date of issue of the work order.
2. The bidder shall submit EMD (Earnest Money Deposit) of Rs. 4000/- (Rupees Four Thousand only), along with the quotation in the form of Demand Draft/ Treasury challan/call Deposit/ Banker's cheque/ Fixed Deposit receipt drawn on a Scheduled Nationalised Bank in favour of Executive Engineer, NEID-I, CWC, Silchar, payable at SBI, Silchar. Quotations received without EMD will be rejected.
3. The rate shall be kept valid for minimum period of 60 days from the date of opening of quotation.
4. The rate of GST should be mentioned as applicable.
5. The rate of works should be quoted both in figure and in words.
6. The quotation number with date of its opening has to be clearly mentioned on the top of the quotation and sealed cover Quotation may be dropped in the Tender/Quotation box kept in the office of the undersigned or may be sent by the registered post. (Marked as quotation for Repair and Maintenance of Type IV quarter (painting Works) to the undersigned so as to reach on or before the date and time stipulated for receiving the quotation. No quotation will be entertained after the stipulated time.
7. On the behalf of president of India, the undersigned reserves the right to cancel/reject in part or any/all the quotation without assigning any reason thereof and without any financial involvement from either side.
8. Any correction in the quotation should be clearly attested.
9. Request for any advance payment will not be entertained.


10. The work carried out by the firm shall be guaranteed for a period of not less than six months from the date of completion of work.
11. The work should be standard quality and free from all defect and if found not suitable the same shall be asked for replacement at his own cost.
12. All taxes applicable as per rule will be deducted from the final bill.
13. Payment will be made through RTGS on production of bills as per actual.
14. Only those firms having PAN, GSTIN clearance certificate, government registration etc. can be eligible to submit their quotation.
15. Any quotation, which does not comply to the above guidelines runs the risk of being rejected.
16. In case of any dispute, the decision of The Executive Engineer, NEID-I, CWC, Silchar-9 shall be final and binding on all concerned.

*Rajat*  
16/01/23

(Rajat Kumar Sharma)  
Executive Engineer

Copy for information and wide circulation to:

1. The Superintending Engineer, NEIC cum M & A, CWC, Shillong
2. The JE (HQ), NEID-I, CWC, Rongpur Part-I, Silchar-9.
3. The Accounts Branch, NEID-I, CWC, Silchar
4. Notice Board, NEID-I, Silchar.
5. Details of this NIQ is also available on CWC Website and CPP Portal.

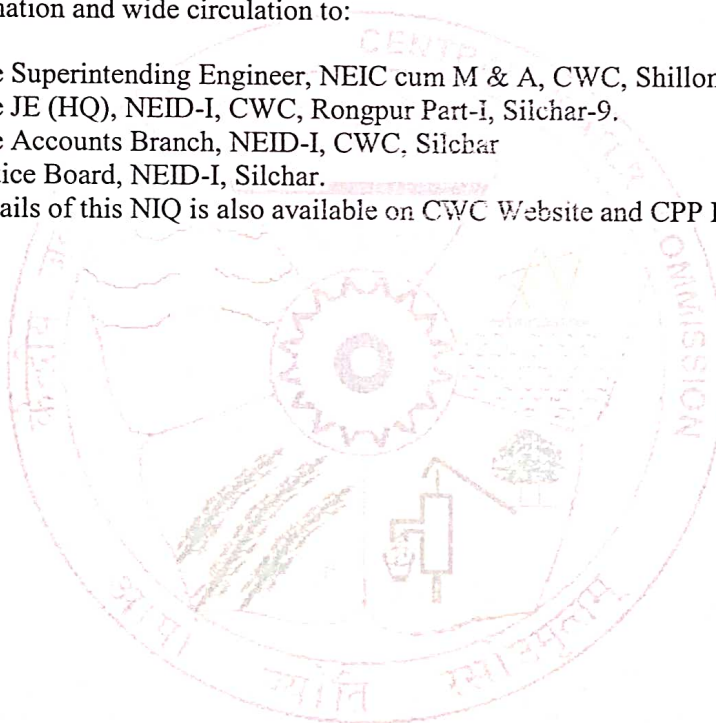

### **SCHEDULE OF QUANTITIES**

**Name Of Work: ‘ Repair & Maintenance of sub division office of ceiling & flooring work in NEID-I, CWC, SILCHAR .**

<b><u>SL. No</u></b>	<b><u>Particulars of items and details of works</u></b>	<b><u>Quantity</u></b>	<b><u>Unit</u></b>	<b><u>Quoted Rate Exclusive GST</u></b>	<b><u>Quoted Amount Exclusive GST</u></b>
1	Dismantling cement asbestos or other hard board ceiling or partition walls including stacking of serviceable materials and disposal of unserviceable materials within 50 metres lead.	68.35	sqm		
2	Providing and fixing tiled ceiling of Multipurpose fibre reinforced by organic and / or inorganic synthetic fibres cement board 6 mm thick of size 595x595 mm in true horizontal level, suspended on inter locking metal grid of hot dipped galvanized steel sections ( galvanized @120 grams/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38 mm made from 0.30 mm thick (minimum) sheet, spaced at 1200 mm center to center and cross "T" of size 24x25 mm made of 0.30 mm thick (minimum) sheet, 1200 mm long spaced between main "T" at 600 mm center to center to form a grid of 1200x600 mm and secondary cross "T" of length 600 mm and size 24x25 mm made of 0.30 mm thick (minimum) sheet to be interlocked at middle of the 1200x600 mm panel to form grids of 600x600 mm and wall angle of size 24x24x0.3 mm and laying false	68.35	sqm		

	ceiling tiles of approved texture in the grid including, required cutting/making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using GI slotted cleats of size 27 x 37 x 25 x 1.6 mm fixed to ceiling with 12.5 mm dia and 50 mm long dash fasteners, 4 mm GI adjustable rods with galvanised butterfly level clips of size 85 x 30 x 0.8 mm spaced at 1200 mm center to center along main T, bottom exposed width of 24 mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-charge.				
3	Providing and laying rectified Glazed Ceramic floor tiles of size 300x300 mm or more (thickness to be specified by the manufacturer), of 1st quality conforming to IS : 15622, of approved make, in colours White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement: 4 Coarse sand), jointing with grey cement slurry @ 3.3 kg/ sqm including grouting the joints with white cement and matching pigments etc., complete.	76.83	Sqm		
<b>*Total Quoted Amount (Rs.)</b>					
<b>Amount in word except GST( )</b>					
<b>GST Rate(%)</b>					

**\*Rate should be exclusive GST:rate of GST should be clearly mentioned.**